

86BYGH1.8° 防水防腐电机 (34H 系列)

技术参数




项目	规格
步距角精度	±5%
电阻精度	±10%
电感精度	±20%
温升	80℃Max.
环境温度	-10℃ -+50℃
绝缘电阻	100MΩMin.500 VDC
介电强度	500VAC
转轴径向跳动	0.06Max.(450 g-load)
转轴轴向跳动	0.08Max.(450 g-load)
绝缘等级	Class B 130°

技术规格


型号	保持力矩	电流	电阻	基本步距角	转动惯量	重量	机身长
	Nm	A	Ω	°	gfc ²	kg	mm
86BYGH260-3004A	2.8	3	1.1	1.8 °	1000	1.7	60
86BYGH260-4504A	2.8	4.5	0.5	1.8 °	1000	1.7	60
86BYGH260-6004A	2.8	6	0.3	1.8 °	1000	1.7	60
86BYGH280-3004A	4.4	3	1.5	1.8 °	1600	2.4	80
86BYGH280-4504A	4.4	4.5	0.65	1.8 °	1600	2.4	80
86BYGH280-6004A	4.4	6	0.4	1.8 °	1600	2.4	80
86BYGH2120-3004A	8.4	3	2.3	1.8 °	3200	4	120
86BYGH2120-4504A	8.4	4.5	1	1.8 °	3200	4	120
86BYGH2120-6004A	8.4	6	0.6	1.8 °	3200	4	120
86BYGH2160-4004A	12	4	1.4	1.8 °	4800	5.5	160
86BYGH2160-6004A	12	6	0.7	1.8 °	4800	5.5	160
86BYGH2160-8004A	12	8	0.38	1.8 °	4800	5.5	160

机械尺寸

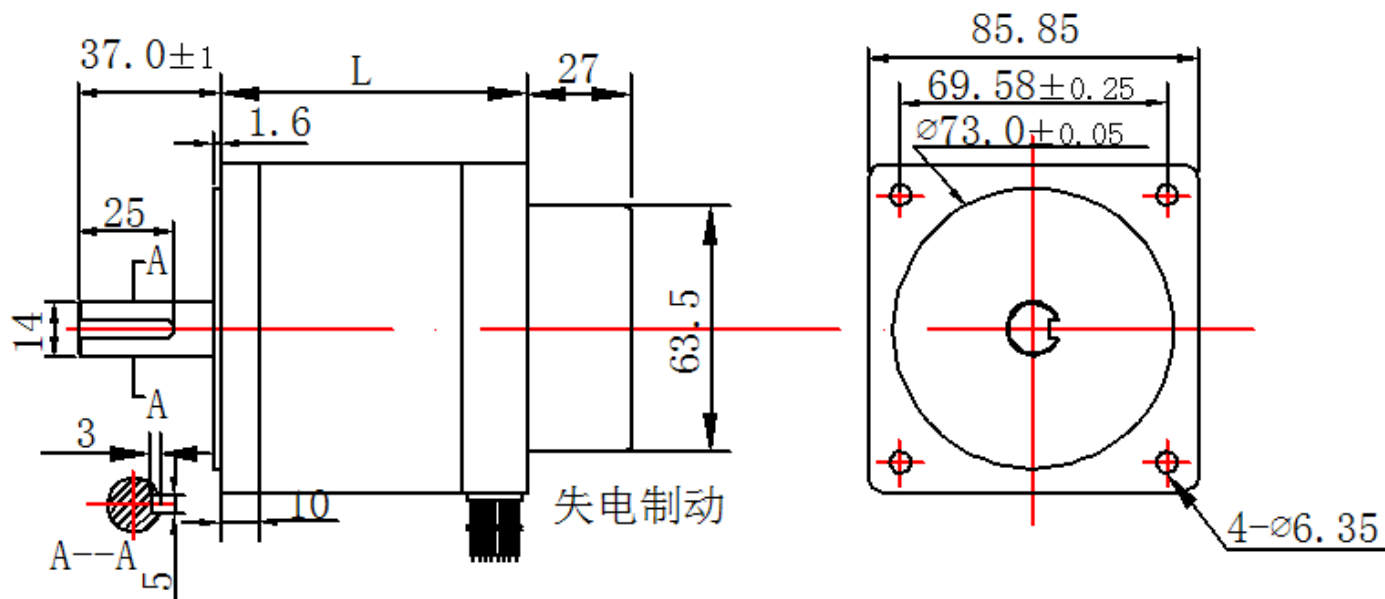


接线图

4LEADES

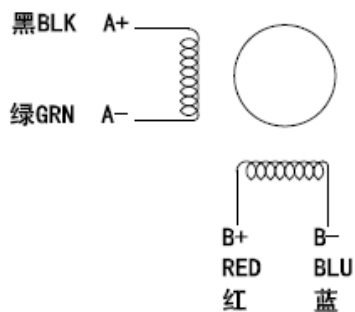

6LEADES

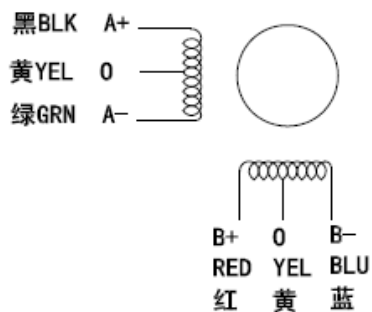

8LEADES

